

Engrave-A-Crete®

Mongoose3

Operating Manual



www.Engrave-A-Crete.com • Phone: +417-924-2300
Order Hotline: 1-800-884-2114 (US and Canada)

Copyright© February 2012

Engrave-A-Crete®, Inc.

403 Oak Ave.

Mansfield, MO 65704

Phone: 1- 800-884-2114 or 1-417-924-2300

Fax: 1-417-924-2500

System copyright © 1996. Revised 1997, 2007, 2008, 2010, 2012, 2017 All rights reserved. No part of this manual or system shall be reproduced, stored in a retrieval system, or transmitted by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, or transmitted by email or otherwise, in any form or by any means without permission in writing from the author or from the publisher.

Although every precaution has been taken and all attempts have been made to verify information provided in this publication, neither the publisher nor the author assume responsibility for errors, inaccuracies, omissions or contrary interpretation of the subject matter herein. Neither is liability assumed for damages resulting from the use of the information contained herein.

This publication is not intended for use as a source of legal or accounting advice. The information contained herein may be subject to varying state and/or local laws or regulations. All users are advised to retain competent counsel to determine what state and/or local laws or regulations may apply to the user's particular business. The purchaser or reader of this publication assumes responsibility for the use of these materials and information. Adherence to all applicable laws and regulations, both federal and state and local, governing professional licensing, business practices, advertising and all other aspects of doing business in the US, Canada or any other jurisdiction is the sole responsibility of the purchaser or reader. Neither the author nor the publisher assume any responsibility or liability whatsoever on the behalf of any purchaser or reader of these materials.

Engrave-A-Crete is a trademark registered in the U.S. Patent and Trademark Office with foreign registrations pending.

KaleidoCrete™

Other trademarks of Engrave-A-Crete, Inc are "Shark™", "Wasp™", "Mongoose 411™", "Barra-cuda™", "Sandroid™", "SawKart™", "Mongoose Air™", Mongoose X".

Be sure to see more equipment, tools and products to make your
business more fun and profitable at
www.Engrave-A-Crete.com and www.ConcreteResurrection.com.

Table of Contents

Mongoose 3™	4
<i>Accessories</i>	<i>5</i>
<i>Safety Rules Warning: Read & Understand All Instructions.</i>	<i>6</i>
Mongoose Operating Adjustments & Fine Tuning	9
<i>Depth Limiting Assembly</i>	<i>10</i>
<i>Adjusting the Pointers to Align with the Blade</i>	<i>11</i>
<i>Check for Lateral Head Play</i>	<i>12</i>
<i>Changing Blades</i>	<i>13</i>
Straight Line Cutting	15
Cutting Circles and Arcs	16
Anchoring a Center Pivot in Place	18
Spiider Articulated Arm	19
Tips, Tricks, & Troubleshooting	20
Diamond Blade MSDS	21
Glossary of Terms	22

Mongoose 3™



Cut beautiful patterns and designs with little effort.

Cut faster and straighter.

Cut with great accuracy and create perfect circles, too!

A precision, compact decorative concrete engraving saw with a powerful electric motor.

Reduced noise.

Mongoose 3 is precision milled from solid blocks of 6061 aluminum.

Features include:

- ◆ Spring loaded head. Press down to cut. Let up and the blade pops out of the cut.
- ◆ Vacuum port makes dust-less cutting a pleasure. Connects to most standard shop vacs.
- ◆ Precision front pointer flips up out of the way to cut closer to walls.
- ◆ Powerful 10,000 RPM, double-insulated motor. 120 V, 8.5 AMP.
- ◆ Cutting depth is adjustable on the fly with a turn of the screw.
- ◆ 3.100" x 0.090" Premium made in USA diamond blade is included.

Accessories



Mongoose 3 Diamond Concrete Engraving Blades

Item	Model #
3.1" x .090"	BL-31090

3.1" x .125"	BL-31125
--------------	----------

3.1" x .250"	BL-31250
--------------	----------


3.1" x .375"	BL-31375
--------------	----------



Non-Marking Wheel Kit

Specifically designed for cutting overlays, micro-toppings and other surfaces which tend to mark easily. Sealed bearings. Set of 3.

Model #: MG-513 -3



Center Pivot

Engrave perfect circles using the center pivot and connecting tubes. The unique base is machined out of rigid, non-marring plastic with cross hair sighting slots and mounting holes.

Model #: MG-505



20" Connecting Tube

Each connecting tube is 20" long and screws together to form extensions for any size circle you need to cut.

2 Connecting Tubes = 7' diameter circle

6 Connecting Tubes = 20' diameter circle

10 Connecting Tubes = 33' diameter circle

Model #: MG-502

Additional Accessories

Spanner Wrench Model #: MGX-93

Wear Respiratory Protection

Wear Eye Protection

Wear Hearing Protection

Wear personal protective equipment appropriate to the tool and the material worked.

WARNING

General Product Safety Information

Read and understand this manual before operating this product. It is your responsibility to make this safety information is available to others that will operate this product.

Failure to observe the following warnings could result in injury.

SAVE THESE INSTRUCTIONS

WARNING:

MISUSE or failure to follow the safety rules stated in this instruction manual may cause serious personal injury.

Always install, operate, inspect and maintain this product in accordance with all applicable standards and regulations (local, state, country, federal, etc.).

Always disconnect power supply before performing maintenance on the tool.

Keep work area clean, uncluttered, ventilated and illuminated.

Do not remove any labels. Replace any damaged label.

Product Safety Information

When Using the Tool:

Always wear eye protection when operating or performing maintenance.

Always wear hearing protection when operating this tool.

Always use personal protective equipment appropriate to the tool and the material worked. This may include dust mask or other breathing apparatus, safety glasses, ear plugs, gloves, apron, safety shoes, hard hat and other equipment.

Prevent exposure and breathing of harmful dust and particles created by power tool use. Some dust created by cutting, sawing, grinding, drilling, and other construction activities contains chemicals known to cause

cancer, birth defects or other reproductive harm. Some examples of these chemicals are: lead from lead based paints, crystalline silica from bricks and cement and other masonry products, and arsenic and chromium from chemically treated lumber. Your risk from these exposures varies, depending on how often you do this type of work. To reduce your exposure to these chemicals: work in a well ventilated area, and work with approved safety equipment, such as those dust masks that are specially designed to filter out microscopic particles.

Keep others (bystanders, children and visitors) a safe distance from your work area, or ensure they use appropriate Personal Protective Equipment.

This tool is not designed for working in explosive environments, including those caused by fumes and dust, or near flammable materials.

Be aware of buried, hidden or other hazards in your work environment. Do not contact or damage cords, conduits, pipes or hoses that may contain electrical wires, explosive gases or harmful liquids.

Keep hands away from cutting area and the blade. Keep all loose clothing, long hair and jewelry away from the tool.

Power tools can vibrate in use. Vibration, repetitive motions or uncomfortable positions may be harmful to your hands and arms. Stop using any tool if discomfort, tingling feeling or pain occurs. Seek medical advice before resuming use.

Product Safety Information, continued

Keep your body stance balanced and firm. Do not overreach when operating this tool.

Maintain a firm grip with both hands on the saw and position your body and arm to allow you to resist KICKBACK forces

Anticipate and be alert for sudden changes in motion, reaction torques, or forces during start up and operation.

The blade may briefly continue rotating after the motor is turned off. Allow the blade to come to a complete stop before picking up the tool.

Do not carry or drag the tool by the cord.

Do not use power tools when tired, or under the influence of medication, drugs, or alcohol.

Never use a damaged or malfunctioning tool or accessory.

Do not modify the tool, safety devices, or accessories.

Do not use this tool for purposes other than those recommended.

Do not use any blade whose maximum operating speed, as defined by its manufacturer, is less than the rated speed of the tool.

Inspect all diamond blades for chips or cracks prior to mounting. Do not use a blade that is chipped, cracked or otherwise damaged.

Inspect the arbor, threads & hub nuts for damage & wear prior to mounting a blade.

Make certain the diamond blade properly fits the spindle.. Do not use reducing bushings to adapt a blade to any arbor unless such bushings are supplied by and recommended by the blade manufacturer.

Ensure that the blade is correctly mounted and tightened before use.

Before starting this tool, the operator shall make sure that no one is in the plane of rotation.

Wear Personal Protective Equipment and remove flammable objects from the work area to ensure that sparks and debris do not create a

hazard when using this tool.

After mounting a diamond cutting blade, place the tool securely on its wheels on concrete or similar hard surface in a protected enclosure, run the motor for at least 90 seconds. Make certain no one is in front of or in line with the blade. Be aware that a blade may fail at this or any other time if it is defective, improperly mounted or the wrong size and speed. Stop immediately if considerable vibration or other defects are detected.

Do not use this tool on materials whose dust or fumes can cause a potentially explosive environment.

Make smooth blade contact with the surface and avoid any bumping action or excessive sudden pressure.

If the tool is dropped or bumped, disconnect the power supply and carefully examine the diamond blade. Discard it if damaged, chipped or cracked. Before reuse, run the tool in a protected enclosure following the same precautions used after first mounting the blade.

Do not use the tool without the blade guards and covers in place.

Blade guard opening must face toward the pavement and away from the operator.

Do not use other types of grinding wheels. Do not use wire wheels, cut-off wheels, composite or non-metallic-grinding wheels on this tool.

Always use blades with correct size and shape arbor holes. Blades that do not match the mounting hardware of the saw will run eccentrically causing loss of control.

The use of other than original manufacturers replacement parts may result in safety hazards, decreased tool performance and increased maintenance, and may invalidate all warranties.

Tool repairs and service should be performed only by qualified authorized trained personnel.

Product Safety Information, continued

The diamond blades used with all Engrave-A-Crete Engravers are made to run dry.

All blades supplied by Engrave-A-Crete have segments that are laser welded to the core.

Blades of unknown origin may have soldered on segments and are very dangerous to use when cutting dry.

Cutting dry has many advantages and has little effect on blade life.

Operate with a shop vacuum as a dust collector. (5 to 6 1/2 hp shop-vacs work well)

Tip: Make operations easier by adding on extra sections of vacuum hose. Also, install a Gortex® Clean Stream filter on the vacuum for better operation.



Mongoose 3 Operating Adjustments

Adjusting the depth of cut



Fig. 1

Turn the depth limiting screw in or out depending on whether more or less depth of cut is desired.



Fig. 2

Turn the depth limiting screw clockwise to reduce cut depth.

Turn the depth limiting screw counter-clockwise to increase cut depth.

The depth limiting screw has 20 threads per inch.

5 Revolutions = $\frac{1}{4}$ inch = 0.250"

2 $\frac{1}{2}$ Revolutions = $\frac{1}{8}$ th inch = 0.125"

1 $\frac{1}{4}$ Revolutions = $\frac{1}{16}$ th inch = 0.0625"

1 Revolution = $\frac{1}{20}$ th inch = 0.050"

Depth Limiting Assembly



Fig. 3

The depth limiting assembly should cause the blade to “hover” about 1/4th inch above the surface.

Adjustments are needed if the blade does not spring out of the cut properly or if it is difficult to hold the blade down in the cut.

If an adjustment is required,

1. Disconnect the power supply before making repairs or adjustments.
2. Make reference marks to indicate the current depth limiting assembly location.
3. Slightly loosen the two screws holding the assembly.
4. Slide the assembly up or down as required.
5. Re-tighten the screws.
6. Be sure the blade completely disengages from the concrete when downward pressure is released.

Depth Limiting Assembly adjustment may be needed when installing a new blade.

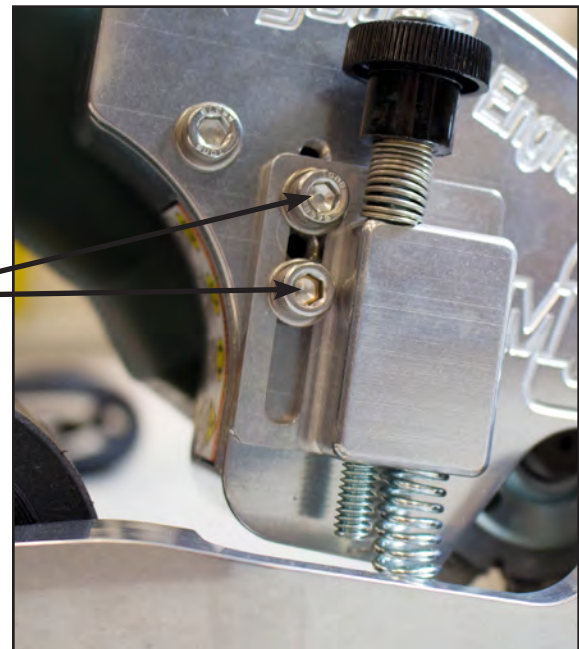


Fig. 4

Checking pointer and sight alignment

Disconnect power. Before each project check sight and pointer alignment.

On a stable surface, place the Mongoose 3 upside down.



Fig. 5

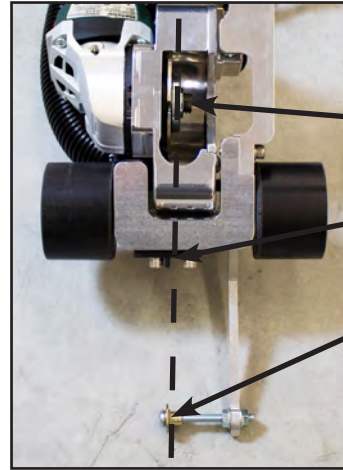


Fig. 6

Lay a framing square or straight edge along the blade to verify the alignment of the sight and pointers.



Fig. 7



Fig. 8

Make a dry run to check for accuracy of alignment.

A) Snap a chalk line.

B) Push tool along the line carefully keeping the front pointer on the line.

C) Visually check the front guide and blade to see if either has drifted off the line. Make sight windage adjustments as necessary.

Check for Lateral Head Play:

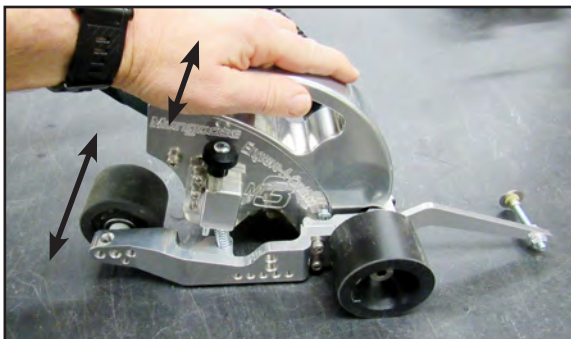


Fig. 9

Disconnect the power supply.

Feel for head play while pushing back and forth, sideways on handle.

Adjusting for Lateral Head Play:

Should the ball bearing pivot hinge between the chassis and the blade guard assembly need tightening:

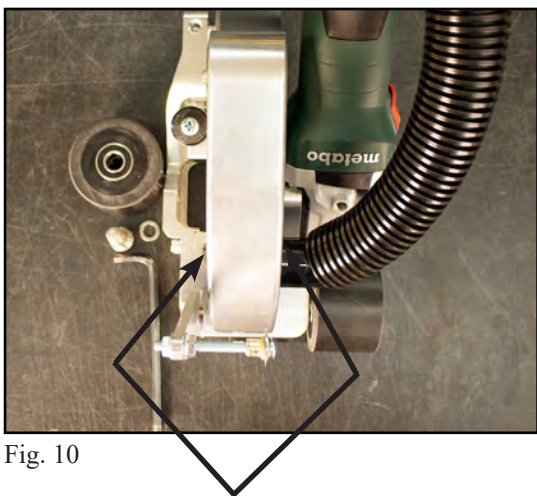


Fig. 10



Fig. 11

Figure 11:

1. Visually determine that the guard assembly is centered between the mounting points on the chassis.

Figure 12:

2. If a gap difference is noted, remove the wheel on the side with the least gap.
3. Using a 3/16th inch hex key, tighten the screw (C) enough to remove the lateral play.
4. Note: The screws are assembled using blue Locktite so they will resist turning.
5. Reinstall the wheels.
6. Check that the blade hovers properly and the pivot hinge operates smoothly.

Changing Blades



Using the supplied 3/16" hex wrench remove one rear screw holding the blade guard cover in place.

Note: the front screw is non-removable.

Fig. 12



Remove the blade guard cover.

Note: it is not necessary to remove the depth limiting assembly from the blade guard cover

Fig. 13



Fig. 14



Fig. 15

While pressing the spindle lock button on the motor (Fig. 14) use the supplied spanner wrench to remove the hub nut. (Fig. 15)



Fig. 16



Fig. 17

When installing a new blade make sure the rotation direction of the blade matches the motor rotation. The arrow should be visible when installed correctly.

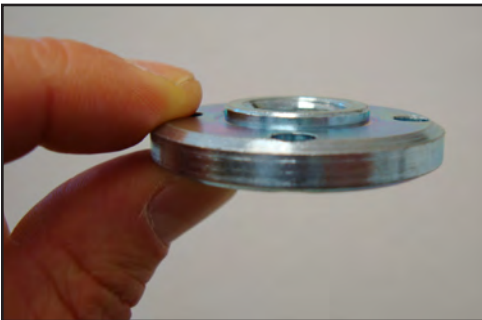


Fig. 18

Install the the hub nut with the raised flange/boss facing outward.

Note: if the raised boss is turned inward on a thin core blade it may result in a loose blade that will spin.

Replace the blade guard cover and adjust the depth limiting assembly height as needed, refer to page 10. Check and adjust pointers and sights, refer to page 11.

Straight Line Cutting

1. Align the flip pointer plus the front guide with the snap line.



Fig. 19



Fig. 20



Fig. 21



Fig. 22

2. Switch the motor on.

3. Grasp a tire to prevent a sudden reverse movement when initially engaging the blade with the surface.

4. Press down on the handle to cut.

Cutting Circles and Arcs

Assemble the connecting tube to the chassis using the upper hole.

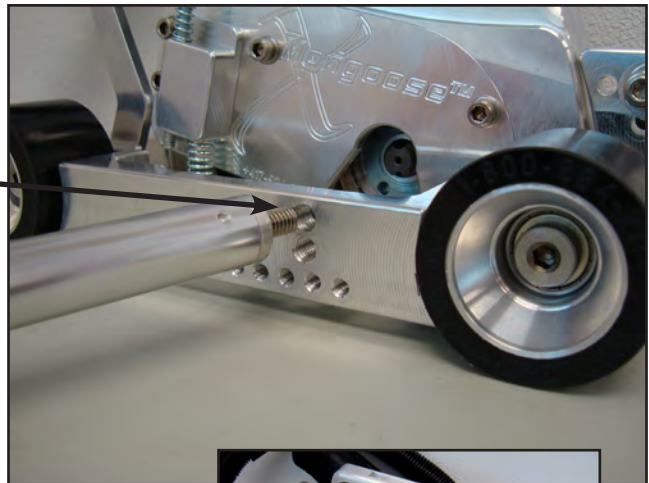


Fig. 23



Fig. 24

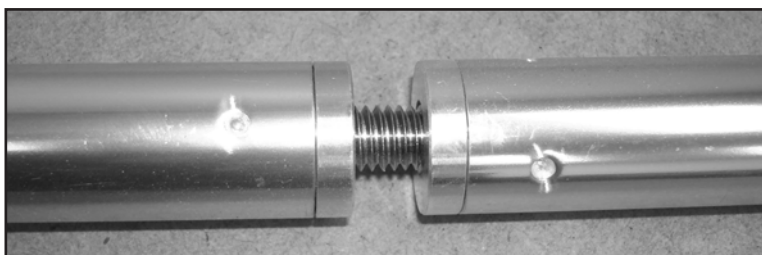


Fig. 25
Assemble enough connecting tubes for the desired radius.



Fig. 26

Slide the connecting tube into the center pivot.

Securely hand tighten the knobs. Slippage of this connection during cutting will result in an ugly circle.

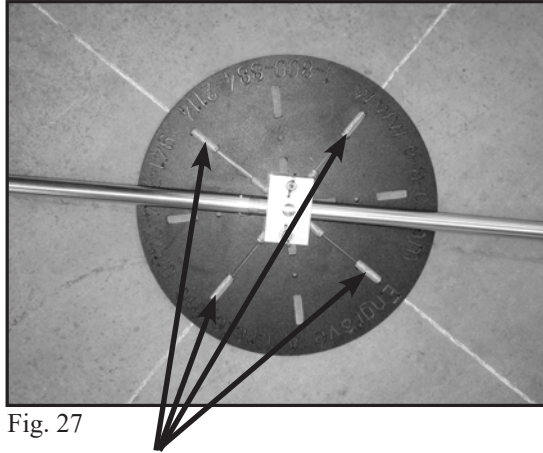


Fig. 27

View the chalk lines through these slots to align the pivot.

A lone operator can stand on the center pivot base and cut small circles.

For larger circles have someone stand on the base or screw it in place as shown on the next page.



Fig. 28

Anchoring a Center Pivot in Place



Fig. 29

Screw It Down

For large circles or arcs, a large number of concentric circles, or anytime the circle may need to be re-cut at a later date, use concrete screws to anchor the pivot in place.

The Concrete Anchoring Kit (Part # ME-301) available from Engrave-A-Crete makes this quick and easy work

Through the hole in the base, drill the concrete.



Slide the screw driver sleeve over the drill bit and insert the screw.

Concrete Anchoring Kit from Engrave-A-Crete (Part # ME-301)



Fig. 30



Fig. 31

Use two screws to anchor the base.

If it will be necessary to chase the cut later, scratch a directional mark on the base for exact relocation.

Reattach the pivot using the same base holes with the directional mark pointing in the correct direction.

Securely hand tighten the pivot knobs. Slippage of this connection during cutting will result in an ugly circle.

Attaching the Spiider Articulated Arm and Wheels to Mongoose 3



Step 1: Remove 3 “wide” wheels from Mongoose 3

Step 2: Using the stainless shoulder bolt, attach the articulated arm to the chassis aft hole. Use a nylon washer under the bolt head and one between the chassis and the steering arm.

Step 3: Screw the two skinny wheels to the upper hole in the chassis.



Step 4: Attach the Multi-Directional Wheel



Tips, Tricks, & Troubleshooting

- Tip:** Make operations easier by adding on extra sections of vacuum hose. Also, install a Gortex® Clean Stream filter on the vacuum for better operation.
- Tip:** The pointers and guides should be checked if:
It's the first cut of the day.
The tool was accidentally kicked or bumped.
The blade was changed.
- Tip:** Drilled anchor holes in the concrete can be filled with a concrete patch material or just left.
- Tip:** It is a good idea to snap all lines prior to cutting. This allows you to check that the layout is visually pleasing.
- Tip:** When cutting free form curves, start on a straight line that leads into a curve. It makes alignment much easier.
- Tip:** If a screw will not seat to the base plate when anchoring the center pivot:
The hole is not deep enough.
Debris is remaining in the hole, or.
The drill bit is worn from drilling too many holes.
- Tip:** Mark the center pivot base with an arrow pointing to a screw hole. Always anchor the center pivot starting with that hole first. Also, keep a mental or written note of the direction this arrow is pointing. This will allow you to exactly reposition the center pivot if it is necessary to remove it before the engraving operations are completed.
- Tip:** Hoses and cords dragging behind will make it difficult to maintain straight cuts. When cutting straight lines, have a helper control the vacuum hose and extension cords. If assistance is not available, place vacuum hose and extension cord over your shoulder.
- Tip:** Smile at those who pass by your jobsite! They may be your next customer!

Diamond Blade MSDS

MATERIAL SAFETY DATA SHEET Diamond Blade MSDS

SECTION I

Product Identification and General Information

Product Name: Metal Bond for Diamond Segments

Product Class: Diamond Segmented Saw Blades

HMIS Codes: Health: 0

Flammability: 0

Reactivity: 0

Date Prepared: 1/20/2011

24 Hour Emergency Assistance

Chemtrec: 1-800-424-9300

SECTION II

<u>Hazardous Ingredients</u>		<u>CAS#</u>	<u>OSHA PEL</u>	<u>ACGIH TLV</u>
Cobalt	50-100%	7440-48-4	0.1	0.1
Copper/Tin (Bronze)	50-100%	7440-50-8	1	1
Chromium	5-15%	7440-47-3	1	0.5
Manganese	-1%	7439-96-5	C5	C5
Molybdenum	5-20%	7439-98-7	15	10
Nickel	5-25%	7440-02-0	1	1
Tungsten	10-30%	7440-33-7	-	5,S10

SECTION III

Physical Data

Boiling Point: N/A

Solubility in Water: 0

Vapor Pressure N/A

Evaporation Rate: 0

Vapor Density: N/A

Appearance: Grey or gold appearance (solid metal)

Specific Gravity: Varies 6-14G/CM³

Odor: 0

Percent Volatiles: 0

Melting Point: 800° C

Solubility in Other Solvent: Will dissolve in strong acids

SECTION IV

Fire and Explosion Hazard Data

Flash Point: N/A

Flammable Limits: N/A

LEL: N/A

UEL: N/A

Extinguishing media: Non-Flammable.

Hazardous Combustion Products: N/A

Special Fire Fighting Procedures: N/A

Breathing N/A

Fire and Explosion Hazards: N/A.

SECTION V

Reactivity Data

Stability: Highly Stable

Hazardous Polymerization: Will not occur

Incompatibility: No known “conditions or materials to avoid”.

SECTION VI

Health Hazard Data

Primary Route of Entry: During cutting

Eye Contact: Dust may irritate eyes.

Skin Contact: Some may experience skin irritation from dust

Inhalation: Active: Coughing, shortness of breath Chronic: Affects breathing capacity

Ingestion: No evidence of adverse effects.

Chronic Overexposure: Cutting may create elevated sound levels which may affect hearing

SECTION VII

First Aid

Eyes: Flush eyes with water. Obtain medical assistance.

Skin: Wash skin with soap and water.

Ingestion: No known adverse effects but ingestion not recommended.

Inhalation: Remove to fresh air. Artificial respiration as needed.

SECTION VIII

Special Protection Information

Respiratory Protection: As needed, approved dust respirators. See OSHA 29CFR1910.134

Ventilation: General mechanical room ventilation is adequate.

Eye Protection: Use safety glasses. See OSHA 29CFR1910.133

SECTION IX

Spill or Leak Procedures: N/A

SECTION X

Shipping Data

D.O.T. Shipping Name: Diamond Segmented Saw Blade

Technical Shipping Name Diamond Segmented Saw Blade

D.O.T. Hazard Class: Not Regulated

UN/NA Number: N/A

Reportable Quantity: None

D.O.T. Labels Required: None

N/A = Not Applicable, N/E = Not Established, N/D = No Data, N/R = Not Required

Glossary of Terms

Arcuate- a cut that bends or curves like a bow or an arch.

Groove- a long, narrow cut, kerf or indentation in a surface formed there by some means.

Long cut- a continuous cut or groove. May be arcuate, straight, serpentine or any combination.

Short cut- any cut or groove beginning and/or ending between long cuts.

Engraving- 1: the art of forming designs by cutting.
2. a series of cuts, grooves, and kerfs forming a pattern.
3. to chase letters, designs, etc. on a hard surface.

Embossed Pattern- 1: to raise or represent surface designs in relief.
2: to remove cured concrete from around an area to represent a raised design or pattern.

Tracked cutting- a method of mechanically controlling a concrete cutting device to produce specific patterns in a concrete surface.

Track free cutting- a method of manually controlling a wheeled concrete engraving tool to produce patterns in a concrete surface

Free hand cutting- a method using cutting tools like the Wasp[™] to produce artistic patterns or designs in a concrete surface.

Engrave-A-Crete System- generally described as a process producing standard building product (brick, tile, cobblestone) patterns in cured concrete using diamond saw blades with or without tracking devices.